

FEATURES

- » **XP product line establishes a new market standard to meet stringent requirements for enhanced performance**
- » **Extended lifetime under adverse environmental conditions**
- » **Patent pending improvements both in structure and in sealing**
- » **Compliant with RoHS, UL, and REACH requirements**
- » **Recommended Applications:**
 - **Actuators, Automotive, Emergency Lighting, Advanced Metering**
 - **Smoke Detectors, Telematics, Backup Systems, etc.**



* Image is not to scale

ELECTRICAL SPECIFICATIONS		
Rated Voltage, V_R		2.7 VDC
Surge Voltage ¹		2.85 VDC
Rated Capacitance, C^2		50 F
Capacitance Tolerance	Max.	-10% / +20%
	Avg. ⁴	+5% / +10%
Initial DC-ESR, R_{DC}^3	Max.	16 mΩ
	Avg. ⁴	10 mΩ
Maximum Leakage Current ⁵		0.073 mA
Maximum Peak Current, Non-repetitive ⁶		37 A
Maximum Stored Energy, E_{max}^7		50.6 mWh
Gravimetric Specific Energy ⁷		3.8 Wh/kg
Usable Specific Power ⁷		4.2 kW/kg
Impedance Match Specific Power ⁷		8.7 kW/kg

TEMPERATURE SPECIFICATIONS	
Operating Temperature Range	-40 ~ 65°C <small>($\Delta CAP < 5\%$ and $\Delta ESR < 100\%$ of initial values measured at 25°C)</small>
Storage Temperature Range	-40 ~ 70°C (stored fully discharged)


TYPICAL LIFETIME CHARACTERISTICS	
High Temp. Endurance (at V_R and 65°C) ⁸	1,500 hours
Projected Room Temp. DC Life (at V_R and 25°C) ⁸	10 years
Biased Humidity Life (at V_R , 60°C, and 90% RH)	3,000 hours <small>(Electrical characteristics not considered)</small>
Cycle Life (at 25°C)	500,000 cycles <small>(Cycled from V_R to $1/2V_R$ using 100mA/F constant current with 10 second rest between charge and discharge steps)</small>
Shelf Life	4 years <small>(Stored fully discharged at under 25°C and under 40% RH)</small>

TYPICAL THERMAL CHARACTERISTICS	
Thermal Resistance, R_{th} (Housing)	25 °C/W
Thermal Capacitance, C_{th}	11 J/°C
Usable Continuous Current ($\Delta T = 15^\circ C$) ⁹	6 A
Usable Continuous Current ($\Delta T = 40^\circ C$) ⁹	10 A

SAFETY & ENVIRONMENTAL

RoHS	Compliant
REACH	Compliant
UL	Compliant

DRAWING

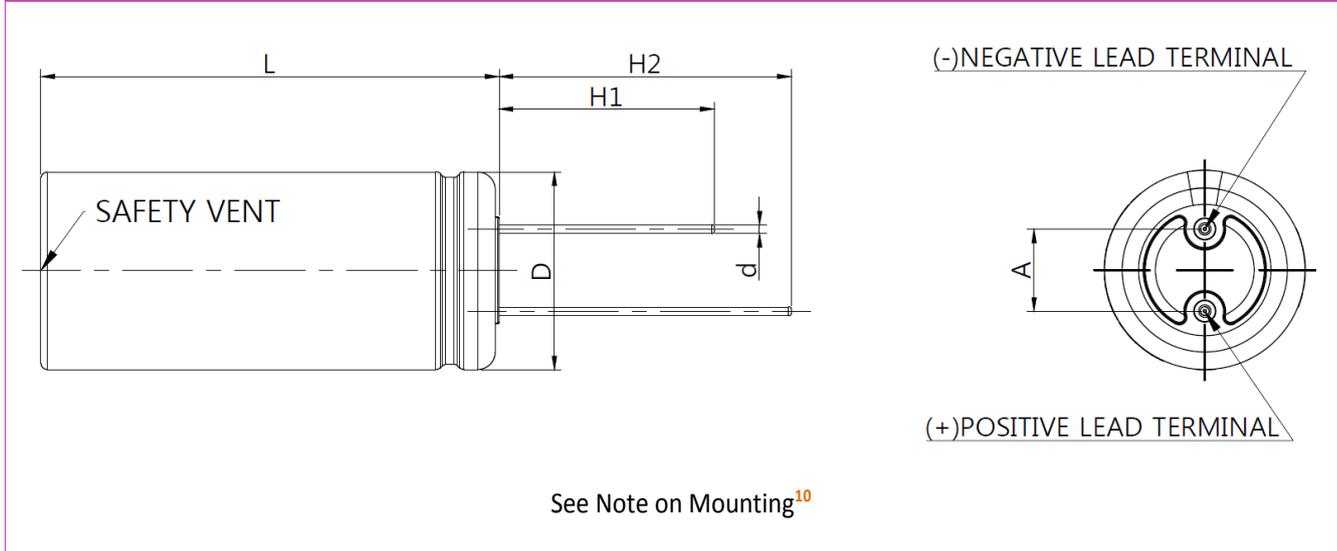

DIMENSION & WEIGHT

D (+0.5)	18.0 mm
L (+2.0)	40.0 mm
H1 (Min.)	15.0 mm
H2 (Min.)	19.0 mm
d (± 0.05)	0.8 mm
A (± 0.5)	7.5 mm
Nominal Weight	13.0 g


NOTE

1. Surge Voltage

- > Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.

2. Rated Capacitance (Measurement Method)

- > Constant current charge with 4CV [mA] to V_R .
e.g. In case of 50F cell, $4 \times 50 \times 2.7 = 540\text{mA}$
- > Constant voltage charge at V_R for 5min.
- > Constant current discharge with 4CV [mA] to 0.4V.




$$C = \frac{I \times (t_2 - t_1)}{v_1 - v_2}$$

where C is the capacitance (F);
 I is the absolute value of the discharge current (A);
 v_1 is the measurement starting voltage, $0.8 \times V_R$ (V);
 v_2 is the measurement end voltage, $0.4 \times V_R$ (V);
 t_1 is the time from discharge start to reach v_1 (s);
 t_2 is the time from discharge start to reach v_2 (s)

3. DC-ESR (DOE Measurement Method)

- > Constant current charge with 4CV [mA] to V_R .
- > Constant voltage charge at V_R for 5min.
- > Constant current discharge with 40CV [mA] to 2.5V.
e.g. In case of 50F cell, $40 \times 50 \times 2.7 = 5,400\text{mA}$



$$ESR_{DC} = \frac{\Delta v}{I}$$

where ESR_{DC} is the DC-ESR (Ω);
 Δv is the voltage drop during first 10ms of discharge (V);
 I is the absolute value of the discharge current (A)

4. Average

- > Typical value or percentage spread that may be present in one shipment

5. Maximum Leakage Current (Measurement Method)

- > The capacitor is charged to the rated voltage at 25°C.
- > Leakage current is the current after 72 hours that is required to keep the capacitor charged at the rated voltage.

6. Maximum Peak Current

- > Current that can be used for 1-second discharging from the rated voltage to the half rated voltage under the constant current discharging mode

$$I = \frac{\frac{1}{2}V_R}{\Delta t / C + ESR_{DC}}$$

where I is the maximum peak current (A);
 V_R is the rated voltage (V);
 Δt is the discharge time (sec); $\Delta t = 1$ sec in this case;
 C is the rated capacitance (F);
 ESR_{DC} is the maximum DC-ESR (Ω)

- > The stated maximum peak current should **not** be used in normal operation and is only provided as a reference value.

7. Energy & Power (IEC 62391-2)

- > Maximum Stored Energy, E_{max} (Wh) = $\frac{\frac{1}{2}CV_R^2}{3600}$
- > Gravimetric Specific Energy (Wh/kg) = $\frac{E_{Max}}{Weight}$
- > Usable Specific Power (W/kg) = $\frac{0.12V_R^2}{ESR_{DC} \times Weight}$
- > Impedance Match Specific Power (W/kg) = $\frac{0.25V_R^2}{ESR_{DC} \times Weight}$

8. High Temp. Endurance and Room Temperature DC Life

- > Test Conditions:
 - Temperature: $65 \pm 2^\circ\text{C}$, $25 \pm 2^\circ\text{C}$
 - Applied Voltage: $V_R \pm 0.02V$
- > End-of-Life Conditions:
 - Capacitance: -30% from the minimum rated value
 - DC-ESR: +100% from the maximum initial value
- > Capacitance and ESR measurements are taken at 25°C

9. Usable Continuous Current

- > Current which can be used within the allowed temperature range under the constant current discharging mode

$$I = \sqrt{\frac{\Delta T}{R_{th} \times ESR_{DC}}}$$

where I is the maximum continuous current (A);
 ΔT is the change in temperature ($^\circ\text{C}$);
 R_{th} is the thermal resistance ($^\circ\text{C}/\text{W}$);
 ESR_{DC} is the maximum DC-ESR (Ω)

10. Mounting Recommendations

- > Provide properly spaced holes for mounting according to the cell dimension as to minimize leads being mechanically stressed.
- > Do not place any copper patterns including the ground pattern or through-holes underneath the cell or on the underside of the PCB as the electrolyte inside the cell, if leaked, can corrode and short-circuit the patterns or damage other components nearby. Spacing of at least 1mm should be provided in between the footprint of the cell and the nearest copper pattern.
- > Protective coating of components on the PCB is strongly recommended in order to reduce the risk of the components being damaged in an event of electrolyte leakage.
- > The recommended mounting orientation is with the terminal leads pointing upward.
- > Provide at least 2mm clearance from the safety vent and do not position anything near the safety vent that may be damaged by vent rupture.
- > Place cells on the PCB taking into account that the cells may not be completely hermetic during its lifetime. Electrolyte vapor and gases generated during normal operation may escape the package.
- > Soldering recommendations for small and medium size cells are available and can be found on www.nesscap.com under Support -> Download.

The contents of this document are subject to change without notice. The values presented are thought to be accurate at the time of writing. Nesscap does not guarantee that the values are always error-free, nor does Nesscap make any other representation or warranty regarding the accuracy or credibility of the information contained in this document. For more information, please reach us at one of following contacts.



Nesscap Energy Inc.

Scotia Plaza
40 King Street West, Suite 580
Toronto, Ontario, M5H 3S1

CANADA



Nesscap Energy Inc.

S24040 Camino Del Avion #A118,
Monarch Beach,
California, 92629

USA



Nesscap Co., Ltd.

17, Dongtangiheung-ro 681beon-gil,
Giheung-gu, Yongin-si, Gyeonggi-do
(17102)

REPUBLIC OF KOREA



Nesscap China

Room 1608-09, Anhui Building
Chuangzhan Center, No.6007 Shennan
Road, Futian District, Shenzhen City

CHINA



Nesscap Energy GmbH

Beerengarten 4
D-86938 Schondorf

GERMANY

marketing@nesscap.com

info@nesscap-energy.de